


NOTE:
All Meter Vaults Shall Be Pre-Approved by EHRWSD

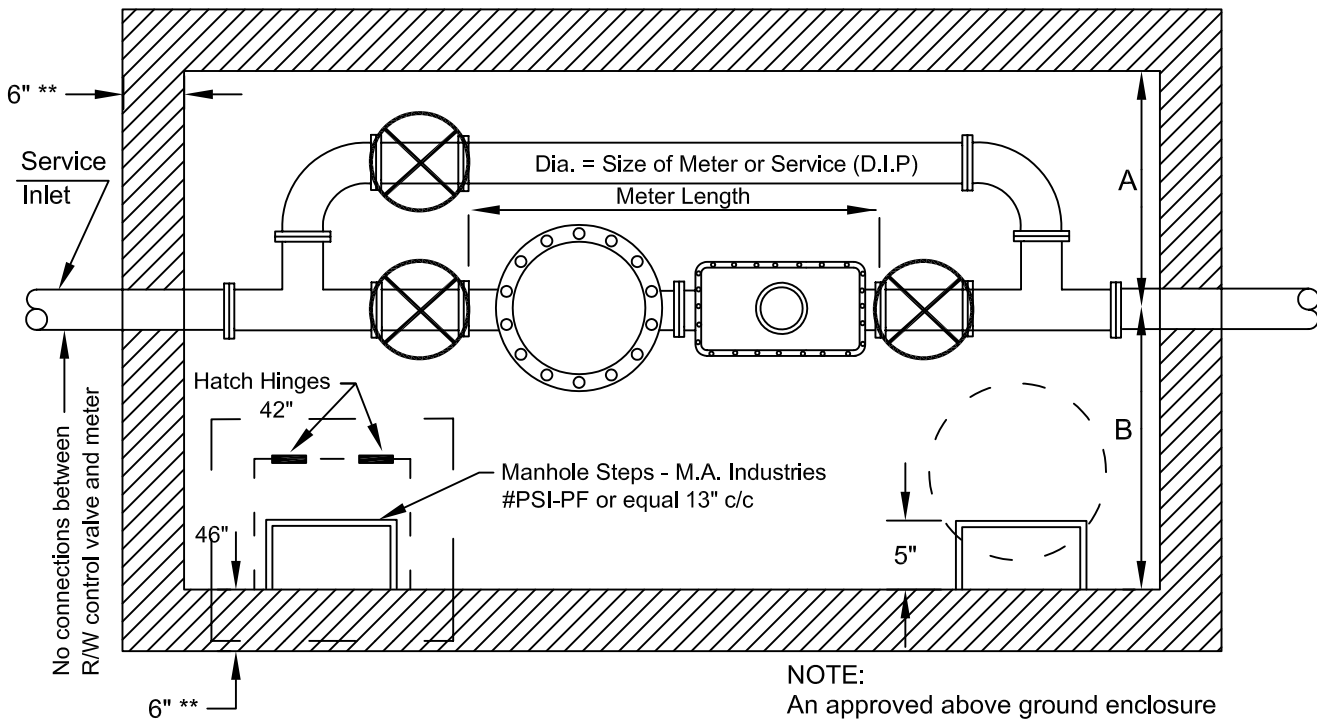

NOTE:
An approved above ground enclosure such as the Hot Box may be used in lieu of a meter pit.

** For Precast Approved Meter Pits

Size	Inside Vault Dimension		Meter Length	Meter Capacity - GPM		Minimum Wall Clearance	
	Length	Width		FSMA	Maximum Continuous Flow	Maximum Intermittent Flow	A
3"	7'-0"	5'-0"	26 3/8"	400	450	2'-6"	2'-6"
4"	7'-0"	6'-0"	21 11/32"	1,000	1,250	3'-0"	3'-0"
6"	9'-0"	8'-0"	30 5/16"	2,000	2,500	4'-0"	4'-0"
8"	10'-0"	8'-0"	36 17/32"	3,500	4,500	4'-0"	4'-0"
10"	12'-0"	10'-0"	44 1/8"	5,500	7,000	5'-0"	5'-0"
12"	14'-0"	10'-0"	68"	5,500	7,000	5'-0"	5'-0"

Dimensions shown are face to face. Allowances must be provided for the thickness of the gaskets to be used.
Contractor is Responsible For Furnishing and Installing Meter Pit and Piping